



PROPERTIES

Automatic with remote control on your smartphone

Hydraulic motorization


Intensive use

Opening 7 sec.

Impact resistance of 11 000 J

Downloadable application for your smartphone

A temporary digital key for your visitors

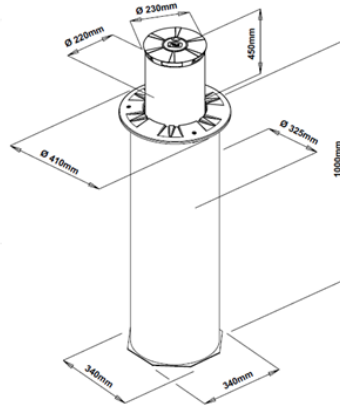

TECHNICAL INFORMATION

Power supply	230 VAC
Absorbed power	250 W
Engine rpm	1400 RPM
Condenser	12.5 μ F
Environmental conditions	-20/+55° C
Led power supply	24 Vac
Degree of protection	IP66
Bollard stroke	450 mm
Average absorption	1A
Opening/closing time	7S
Foundation pipe weight	35 Kg
Inside pipe weight	45 Kg

INSTRUCTIONS AND SUPPORT:

www.parklio.com/support/

APPLICATION DOWNLOAD:

(Android) https://play.google.com/store/apps/details?id=com.parklio.parklio746237&hl=en_US

(Apple) <https://itunes.apple.com/hr/app/parklio/id1316429271?mt=8>