


## Technical Information


How the energy from a vehicle impact is calculated

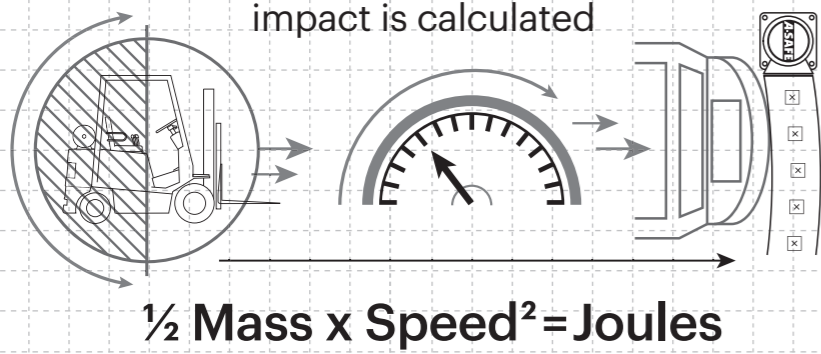

Tested Impact Energy

**8,200 Joules**


Equivalent vehicle and speed



Mid Rail 45° Impact on 1500mm Post Centres


Impact Test	Impact Angle on 1500mm Post Centres			
	90°	45°	22.5°	10°
Mid Rail Max Energy (Joules)	5,800	8,200	15,150	33,400

End Post Max Energy (Joules) - 90°	3,700
Mid Post Max Energy (Joules) - 90°	2,700

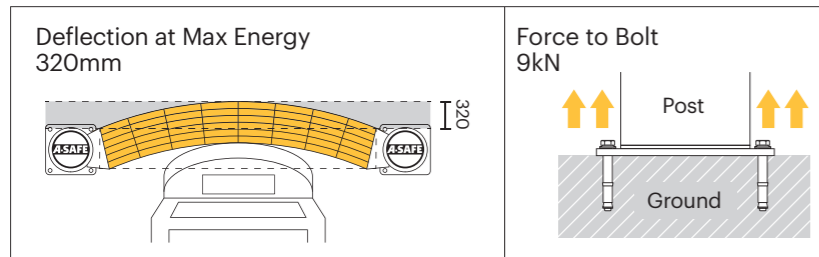

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	Yes


\* Weathering scale 1 is very poor and 5 is excellent  
\*\* Light stability scale 1 is very poor and 8 is excellent

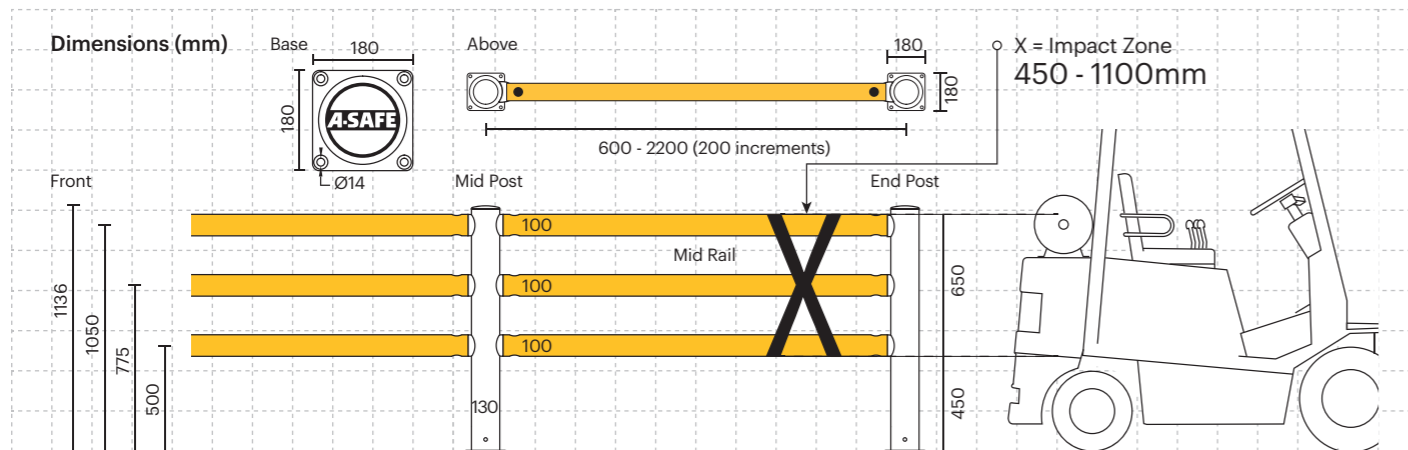

### Post Options



### Rail Options

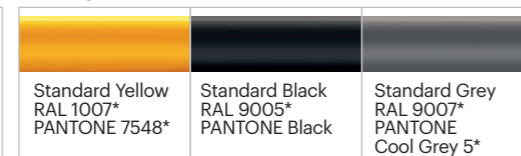

### Colour Combinations

\*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.



iFlex™

Pedestrian Barrier 3 Rail

# A-SAFE

Est. 1984



Designed to segregate and safeguard pedestrians from moving vehicles and potential workplace hazards both inside and out.

This flexible, energy-absorbing barrier visually defines traffic routes, and physically protects pedestrians and drivers if an accident does occur by cushioning and deflecting impact forces.

Ideal for areas where vehicles are in operation and there is a risk of collision.



Code of Practice for Workplace Safety Barriers

PAS13 2017

A-SAFE Headquarters

Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.

www.asafe.com



# Engineered for performance

A-SAFE's state of the art products are meticulously engineered to deliver the highest performance. Designed, developed, tested and manufactured in-house at our cutting-edge facility, each unique component is carefully crafted and purpose-built to play a vital role in the product's performance.

**Advanced strength polymer** created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

**Univalled recovery** through a unique built-in memory that allows the barrier to flex, cushion and reform repeatedly upon impact, saving vast amounts in barrier and vehicle repairs.

**Huge return on investment** from incident prevention and downtime avoidance as barriers, vehicles, floors and equipment do not need replacing or repair.

**Multi-directional system** ensures a streamlined fit into any facility and the removal of hard angles.

**Ultra-low maintenance** material is chemical and water resistant, non-corrosive, non-scratch and self coloured so no repainting, rusting, flaking or corrosion.

**Exclusive modularity** allows rails and posts to be replaced in-situ without removing adjacent barrier sections.

**Energy Absorption System**  
Patented system dissipates impact forces through the barrier and away from floors and fixings, preventing costly damage.

**Hygiene seals** remove ingress points.

**Food safe, wipe-clean, water resistant surface.**

**Ergonomic design with no sharp edges.**

**No floor damage** 80% of impact force is absorbed, transferring just 20% to the floor.

**Environmentally friendly and 100% recyclable.**

**Self coloured and UV stabilised** for continued visibility and long lasting aesthetics with no repainting.

**Zinc nickel, electrophoretic coating** on base plates as standard, provides advanced protection against corrosion damage.

**Revolutionary 3-Layered Material**

- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilised colour layer


**Patented Engineering**  
Molecular reorientation during manufacturing creates a unique built-in memory that enables the barrier to fully recover following impacts.

**ADDITIONAL BASE OPTIONS**


<b>Countersunk Bolts</b> Creates a flat surface, preventing tyre damage where vehicles are in close proximity.	<b>Galvanised Steel</b> Increased weather resistance for outdoor use and harsh climate environments.	<b>Stainless Steel 316 Standard</b> Ultimate performance option, no corrosion or rusting and resistant to powerful cleaning agents. Ideal for hygiene environments.	<b>Stainless Steel 316 Countersunk</b>

## Energy Absorption System

A patented 3-phase system that activates sequentially for unparalleled energy absorption

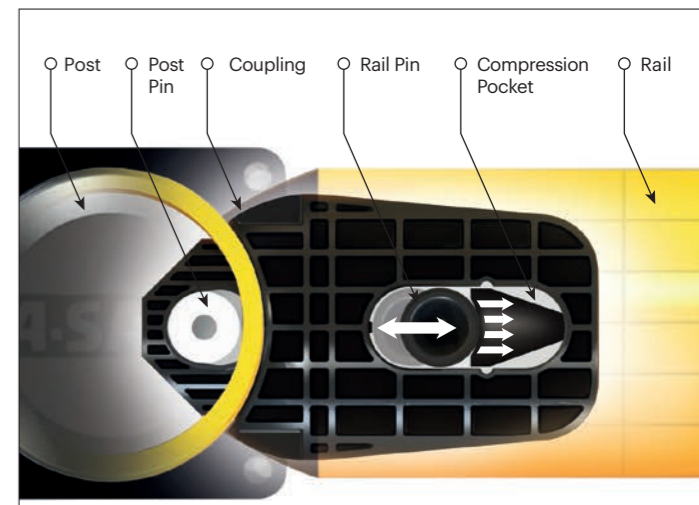

**PHASE 1:** Memaplex™ rail flexes to absorb impact, initiating the rail pin to slide forward and transfer load energy to the compression pocket.

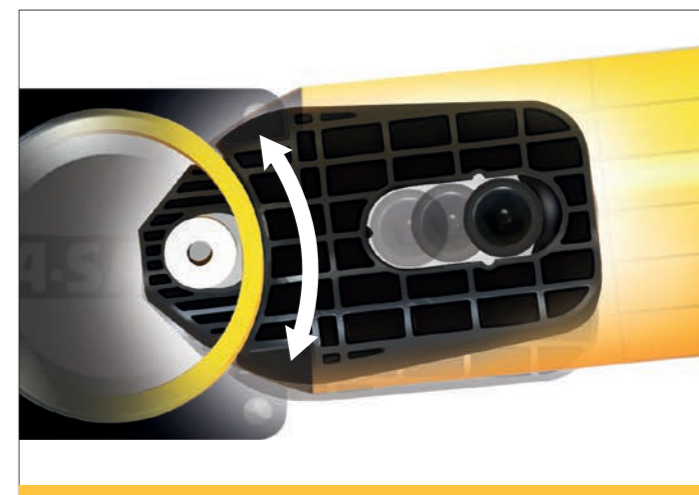

**PHASE 2:** Compression of the pocket continues to disperse energy as the coupling rotates around the post pin to activate further absorption.



**PHASE 3:** At peak energy, the coupling twists further, engaging the post pin and instigating torsion of the post to dispel remaining forces.